


- Modular lighting systems for continuous lines.
- Extruded aluminium section in minimal version (anodized grey finish) complete with concealed aggregation couplings.
- Minimal section for recessed installation on ceiling or wall, ceiling-mounted or suspended with dedicated accessories.
- 90° angular luminous sections.
- Zamak end caps.
- Methacrylate opal diffuser designed for coupling multiple lengths with overlapping.
- Methacrylate prismatic transparent diffuser designed for coupling multiple lengths with overlapping.
- Electronic multiwatt control gears.
- Direct luminous emission.
- The technical characteristics of the fitting comply with EN60598-1 standard.
- IP20
- F seal
- ENEC approval
- Class of Insulation I



Diffuser overlapping

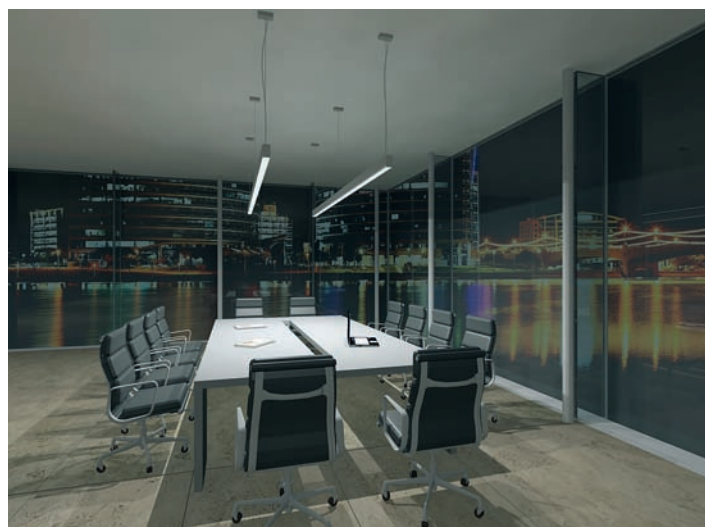

Seamless version



code lamp length
Initial module complete with opal diffuser
opal and multiwatt electronic control gear

M656	24 W	T 16 SLS	601
M657	21/39 W	T 16 SLS	901
M658	28/54 W	T 16 SLS	1201
M659	2x14/24 W	T 16 SLS	1186
M660	2x21/39 W	T 16 SLS	1786
M661	2x28/54 W	T 16 SLS	2386

IP20

Complete with end caps

Kg.	M656	M657	M658
	1,20	1,70	2,00
Kg.	M659	M660	M661
	1,90	2,60	3,30




Continuous line module complete
with opal diffuser and multiwatt
electronic control gear

M662	2x14/24 W	T 16 SLS	1170
M663	2x21/39 W	T 16 SLS	1770
M664	2x28/54 W	T 16 SLS	2370

IP20

Kg.	M662	M663	M664
	1,80	2,50	3,20






Angular module complete with opal diffuser
and multiwatt electronic control gear

MWG3	14/24 W	T 16 SLS
-------------	---------	----------


IP20

Kg. 1,80

For information on wattage of recessed
applications please refer to the instructions sheet



32 75



installation systems



code
Suspension kit complete with base
and clear power cord
MWG5

Available in colour 01



Suspension kit without power supply
MWG6

Available in colour 00



code
Attachment for ceiling-mounted installation
MWG7

Available in colour 00



Recessed installation without rim
MWG8

Available in colour 00



12



code lamp length

Initial module complete with microprismatic diffuser and multiwatt electronic control gear

M665	24 W	T 16 SLS	601
M666	21/39 W	T 16 SLS	901
M667	28/54 W	T 16 SLS	1201
M668	2x14/24 W	T 16 SLS	1186
M669	2x21/39 W	T 16 SLS	1786
M670	2x28/54 W	T 16 SLS	2386

IP20

Complete with end caps

M665	M666	M667
Kg. 1,20	1,60	2,00

M668	M669	M670
Kg. 1,90	2,60	3,30




Continuous line module complete with microprismatic diffuser and multiwatt electronic control gear

M671	2x14/24 W	T 16 SLS	1170
M672	2x21/39 W	T 16 SLS	1770
M673	2x28/54 W	T 16 SLS	2370

IP20

M671	M672	M673
Kg. 1,80	2,50	3,20






Angular module complete with microprismatic diffuser and multiwatt electronic control gear

MWG4	14/24 W	T 16 SLS
-------------	---------	----------


IP20

Kg. 1,80

For information on wattage of recessed applications please refer to the instructions sheet



32
75



installation systems



code
Suspension kit complete with base and clear power cord
MWG5

Available in colour 01



Suspension kit without power supply
MWG6

Available in colour 00



code
Attachment for ceiling-mounted installation
MWG7

Available in colour 00



Recessed installation without rim
MWG8

Available in colour 00